


HATCHGUARD ROOF RAILING SYSTEM: INCLUDING POSTS, RAILS, BASES, AND FITTINGS.

Freestanding counterweighted guardrail system with 42 inches minimum height provides a barrier for workers on the roof and must be designed to withstand OBC loading criteria.


Support Bar: Aluminum
18" bar placed in the middle of rails.




Fittings: Aluminum
Magnesium Alloy,
535.

Fasteners: stainless
steel.

Pipe: Aluminum T6-6061,
1.5" SCH. 1.90 inches O D.

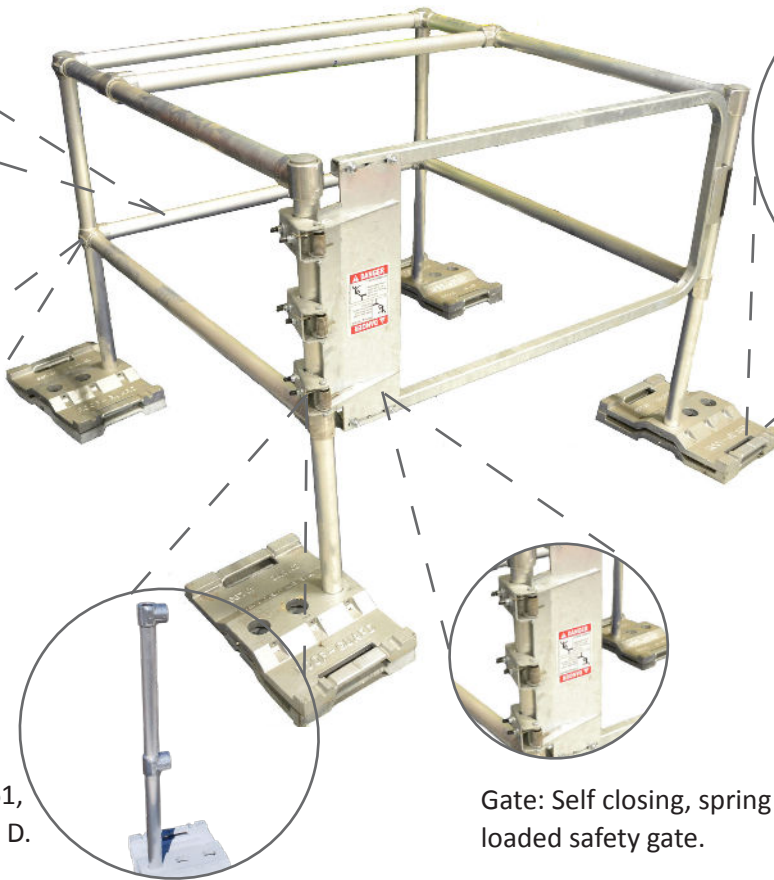

Stackable Base Plates:
Galvanized cast steel
weights (40 lbs) with
three optional holes
for vertical post-
placement. Includes
handles to avoid pinch
points. Masticated
rubber pad included.



Gate: Self closing, spring
loaded safety gate.



WHY ROOFGUARD?

- Systems are customizable and can be configured to best suit the customer's needs
- User friendly and ergonomic
- Ships on compact skids (low shipping costs)
- Low cost & easy installation

REQUEST A FOLLOW-UP

Email: info@liftsafegroup.com
Call: 1-800-977-2005

Liftsafe Fall Protection, Inc.
A Division of Liftsafe Group of Companies
409 Harmony Rd, Ayr, ON N0B 1E0
P: (519) 896-2430 | TF: (800) 977-2005 | F: (519) 896-2085
E: info@liftsafegroup.com | W: www.liftsafegroup.com



LIFTSAFE
GROUP OF COMPANIES