


ROOFGUARD ROOF RAILING SYSTEM: INCLUDING POSTS, RAILS, BASES, AND FITTINGS.

Freestanding counterweighted guardrail system with 42 inches minimum height provides a barrier for workers on the roof and must be designed to withstand OBC loading criteria.

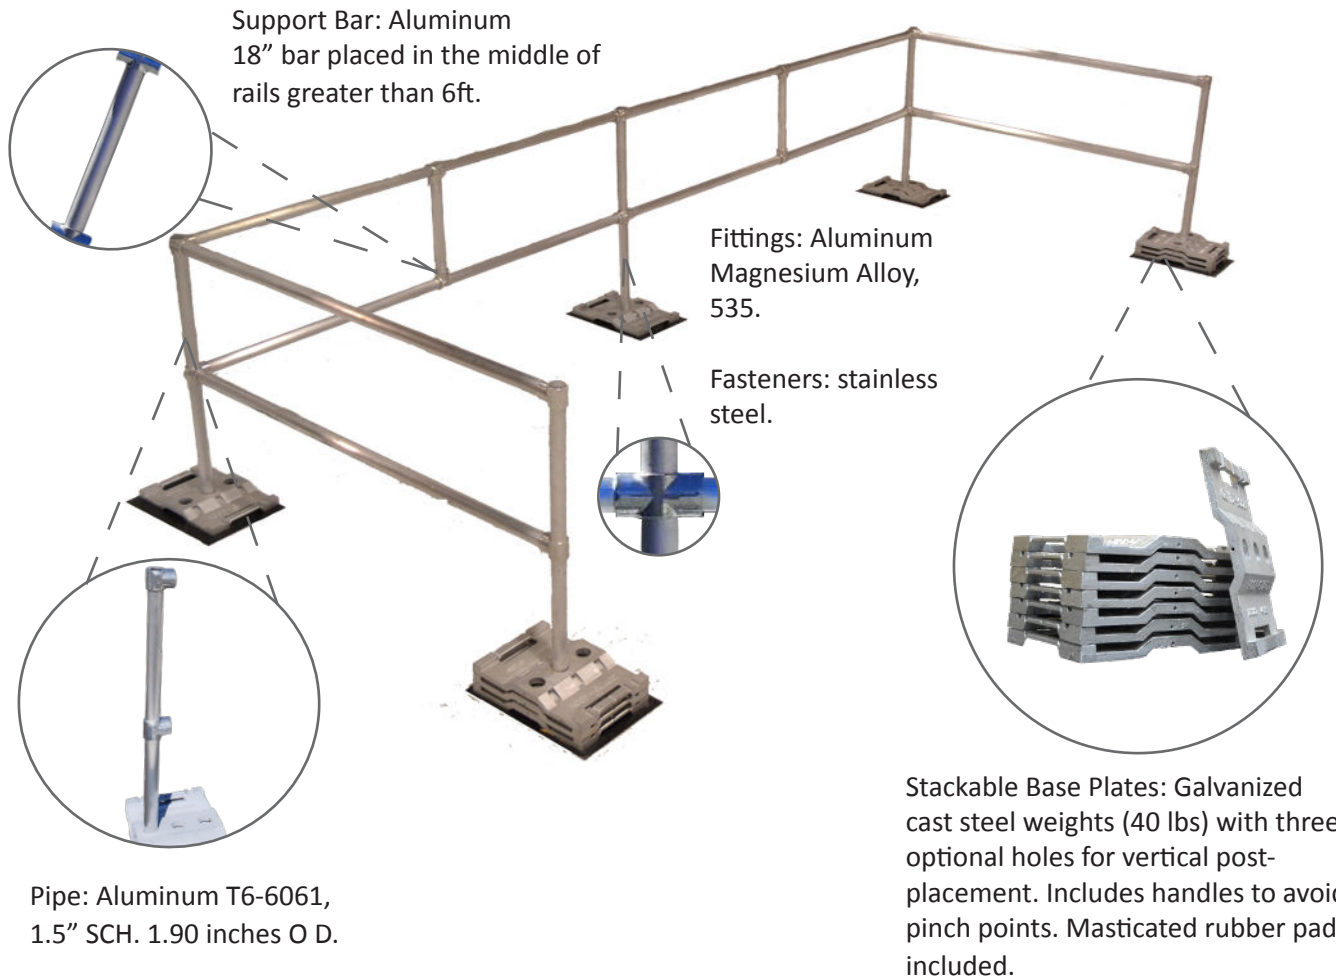


Support Bar: Aluminum
18" bar placed in the middle of
rails greater than 6ft.

Fittings: Aluminum
Magnesium Alloy,
535.

Fasteners: stainless
steel.

Pipe: Aluminum T6-6061,
1.5" SCH. 1.90 inches O D.

Stackable Base Plates: Galvanized
cast steel weights (40 lbs) with three
optional holes for vertical post-
placement. Includes handles to avoid
pinch points. Masticated rubber pad
included.

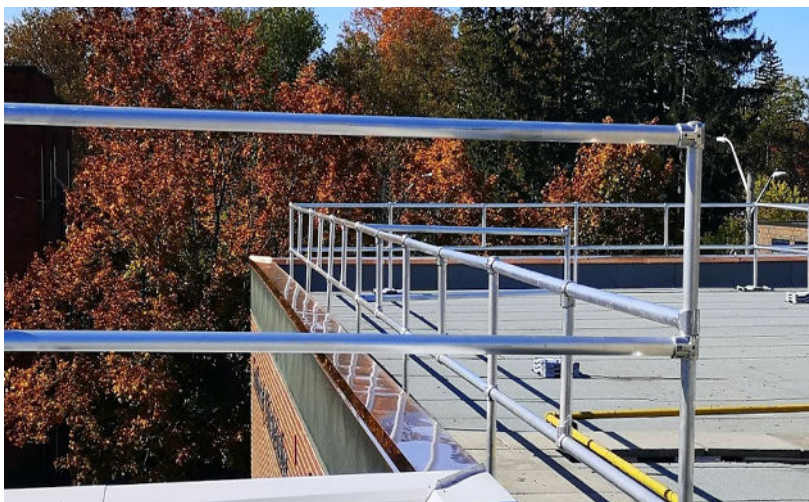

WHY ROOFGUARD?

- Systems are customizable and can be configured to best suit the customer's needs
- User friendly and ergonomic
- Ships on compact skids (low shipping costs)
- Low cost & easy installation

REQUEST A FOLLOW-UP

Email: info@liftsafegroup.com

Call: 1-800-977-2005