


ROOFGUARD ROOF RAILING SYSTEM: INCLUDING POSTS, RAILS, BASES, AND FITTINGS.

Freestanding counterweighted guardrail system with 42 inches minimum height provides a barrier for workers on the roof and must be designed to withstand OBC loading criteria.

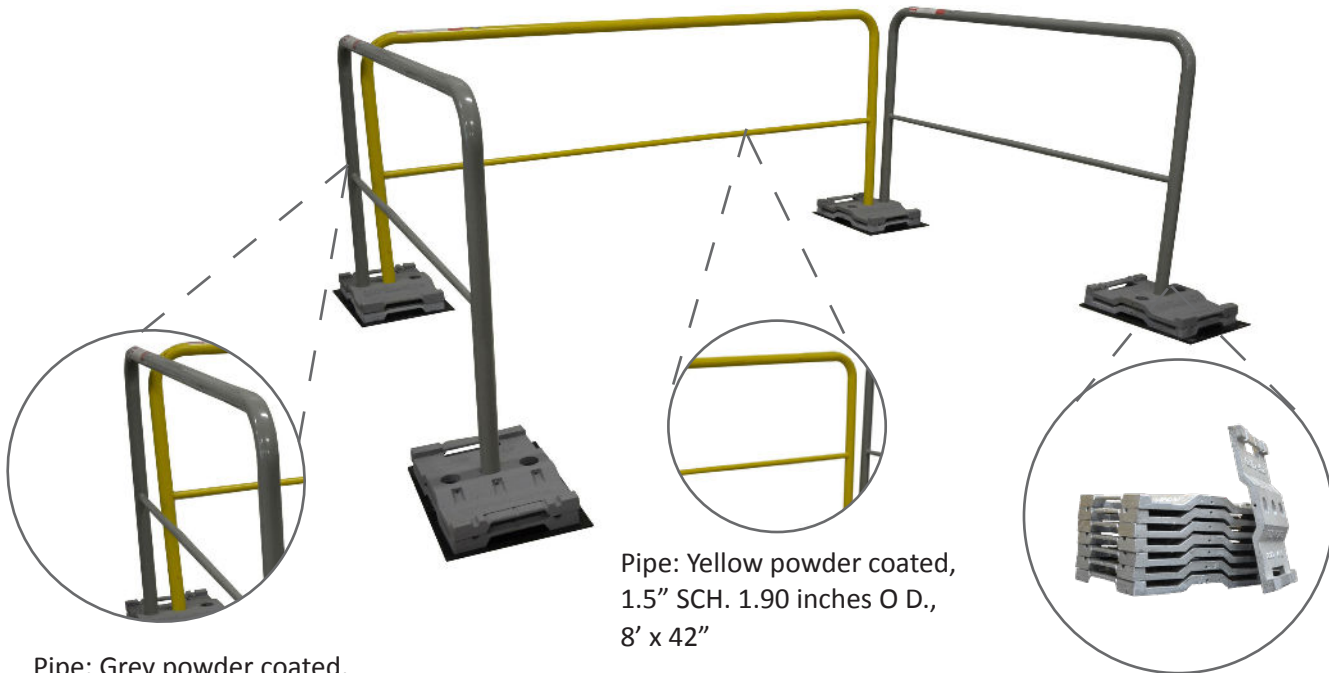

Pipe: Grey powder coated,
1.5" SCH. 1.90 inches O D.,
6' x 42"

Pipe: Yellow powder coated,
1.5" SCH. 1.90 inches O D.,
8' x 42"

Stackable Base Plates: Galvanized cast
steel weights (40 lbs) with three optional
holes for vertical post-placement.
Includes handles to avoid pinch points.
Masticated rubber pad included.



WHY ROOFGUARD?

- Systems are customizable and can be configured to best suit the customer's needs
- User friendly and ergonomic
- Low cost & easy installation

REQUEST A FOLLOW-UP

Email: info@liftsafegroup.com

Call: 1-800-977-2005

Liftsafe Fall Protection, Inc.
A Division of Liftsafe Group of Companies
409 Harmony Rd, Ayr, ON N0B 1E0
P: (519) 896-2430 | TF: (800) 977-2005 | F: (519) 896-2085
E: info@liftsafegroup.com | W: www.liftsafegroup.com



LIFTSAFE
GROUP OF COMPANIES