

# SPECIFICATION SHEET

### ROOFGUARD X-PRESS GUARDRAIL SYSTEM

### DID YOU KNOW...

It is required by law that each employee on a walking /working surface with an unprotected side or edge of 6 feet or more above a lower level must be protected by the use of guardrail, safety net or personal fall arrest systems.

#### **ROOFGUARD X-PRESS**

A versatile, economic and modular fall protection system designed to protect employees/contractors performing job functions at the leading edge of a rooftop.


Our system requires no penetration of the roof surface. Our counterweighted system utilizes stackable cast steel base plates to provide enough weight on the "returns" to meet all lateral force loading requirements. Consists of prefabricated, powder coated pipes and galvanized steel base plates.

Easy to use, easy to install, saves lives!

## MEETS AND EXCEEDS ALL MAJOR NORTH AMERICAN SAFETY STANDARDS

OHSA NBC CSA CE
OBC OSHA BS EN


MOL ANSI WORKSAFEBC

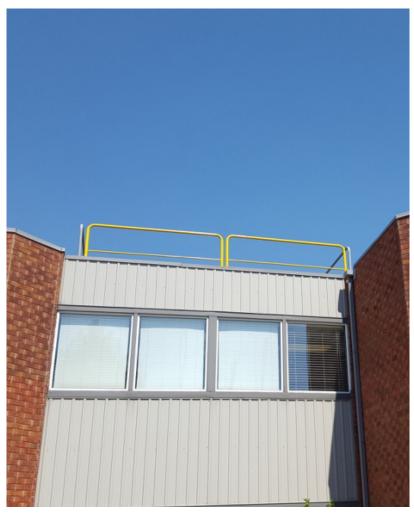



### ROOFGUARD ROOF RAILING SYSTEM: INCLUDING POSTS, RAILS, BASES, AND FITTINGS.

Freestanding counterweighted guardrail system with 42 inches minimum height provides a barrier for workers on the roof and must be designed to withstand OBC loading criteria.

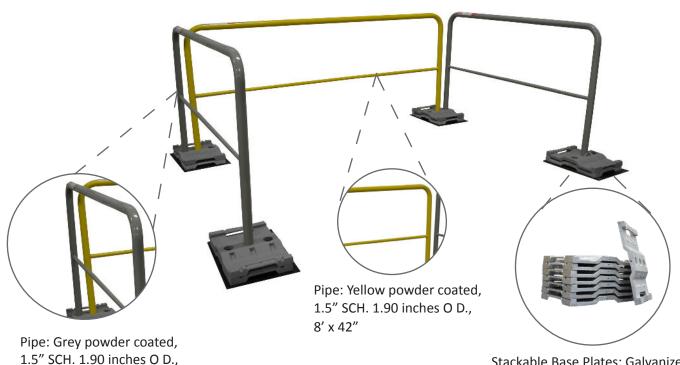

Stackable Base Plates: Galvanized cast steel weights (40 lbs) with three optional holes for vertical post-placement. Includes handles to avoid pinch points. Masticated rubber pad included.



### **WHY ROOFGUARD?**

- Systems are customizable and can be configured to best suit the customer's needs
- User friendly and ergonomic
- Low cost & easy installation

#### **REQUEST A FOLLOW-UP**

Email: info@liftsafegroup.com

Call: 1-800-977-2005

Liftsafe Fall Protection, Inc.
A Division of Liftsafe Group of Companies
409 Harmony Rd, Ayr, ON NOB 1E0
P: (519) 896-2430 | TF: (800) 977-2005 | F: (519) 896-2085
E: info@liftsafegroup.com | W: www.liftsafegroup.com

6' x 42"

